

# BCUNV40


Universal Voltage Ballast




## Electronic Ballast

- High Power Factor
- Sound Rating A
- Class P
- Inherent Thermal Protection
- No PCB's
- type "cc"
- Auto Reset
- Universal Voltage
- UL Listed
- cUL Listed


Ballast Type	Application	Line Voltage	Min. Start Temp	Start Type	Mounting Style	Dimensions
Fluorescent	(1/2) F32T8 or ( 1/2) F40T8	108 - 264v	-20°F	Rapid Start	Mounting Feet	9.75" x 1.58" x 1.07"

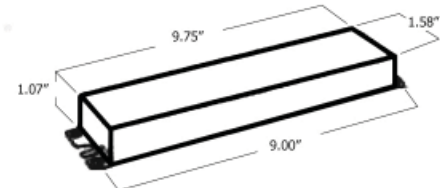

## WIRING DIAGRAMS

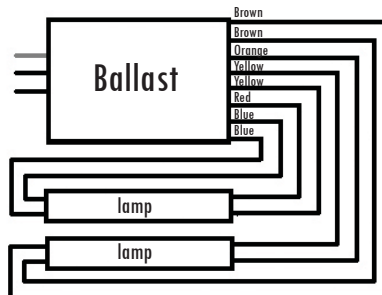

WD 01

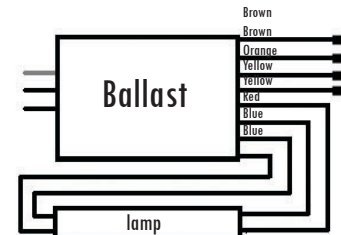

\*use either set of 4 wires, and cap all unused wires individually

WD 02